

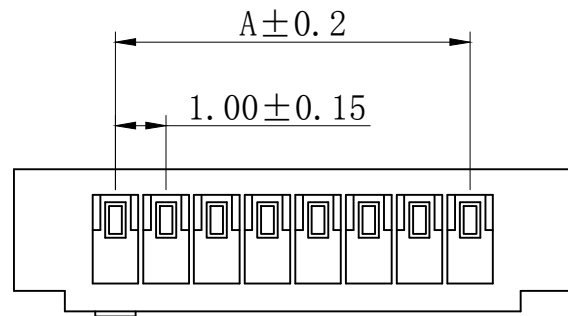
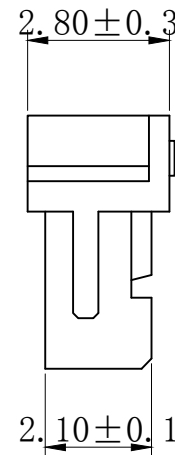


版次	日期	内 容

Electrical properties

- 1、Current rating: 1A AC\DC
- 2、Voltage rating: 50V AC\DC
- 3、Temperature range: -25°C to 85°C
- 4、Contact resistance:Initial value/20mΩ max
- 5、Insulation resistance:100MΩ min
- 6、Withstanding voltage:500V AC/ minute
- 7、Material : PBT UL94V-0

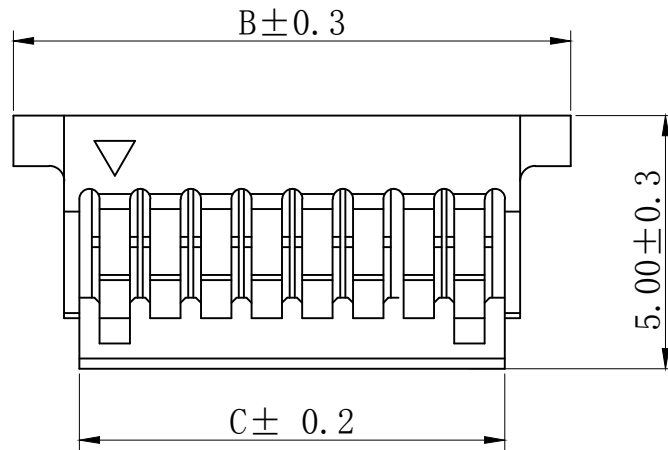

孔位 poles	A	B	C
2	1.0	5.0	2.4
3	2.0	6.0	3.4
4	3.0	7.0	4.4
5	4.0	8.0	5.4
6	5.0	9.0	6.4
7	6.0	10.0	7.4
8	7.0	11.0	8.4
9	8.0	12.0	9.4
10	9.0	13.0	10.4
11	10.0	14.0	11.4
12	11.0	15.0	12.4
13	12.0	16.0	13.4
14	13.0	17.0	14.4
15	14.0	18.0	15.4
-	-	-	-
20	19.0	23.0	16.4

浙江乐马电气有限公司			设计	张书晨	
尺寸公差	角度公差	品名:	SHH-nY	审核	王佳
.X ±0.25	X.° ±3.0°	图号:		10001-Y	批准
.XX ±0.15	.X° ±2.0°	单位:	mm		比例:
.XXX ±0.05	.XX° ±1.0°	单位:		mm	页数:
			比例:	--	版本:
					A